

# Crystal Surface Mount

## 8" Letters

New York City Calender #44118

# Edge-lit LED Exit Signs

## Series CRS8

CRS8.10.05.05



### CONSTRUCTION


- Extruded aluminum LED lamp housing mounts to a form-fitting canopy in solid aluminum that contains a "cam lock" device, which is field adjustable for wall or ceiling mount.
- Standard finishes: satin white and brushed aluminum.
- Optional finishes: Painted colors in any custom shade, or anodized finishes in satin bronze, polished gold, mirror silver & many others.
- Diamond polished acrylic lenses for optimum light transmission, exterior quality and high brightness.
- Ultra high output LEDs produce brilliant graphic illumination well above code minimums

### MULTILITE MASTER-REMOTE SYSTEM

- All versions of this product have multiple remote capabilities. Up to 30 remotes may be connected to a Central Panel (Series MCS), or up to 5 remotes may be connected to a Master Sign (Series MTL). See MULTILITE spec sheets for full details.
- MULTILITE is the most cost-effective installation for all types of exit lights.

### ELECTRONICS

- Isolated, all solid state power supply with 2-wire universal input from 120 VAC to 277 VAC with precise current and voltage regulation.
- Power supply is surge and spike protected, with a low voltage disconnect.
- The complete power supply module with optional NICAD battery pack is sealed within a phenolic plastic enclosure, which fits inside a standard 4" square deep J-box. AC and DC wiring is quickly attached with plug connectors.

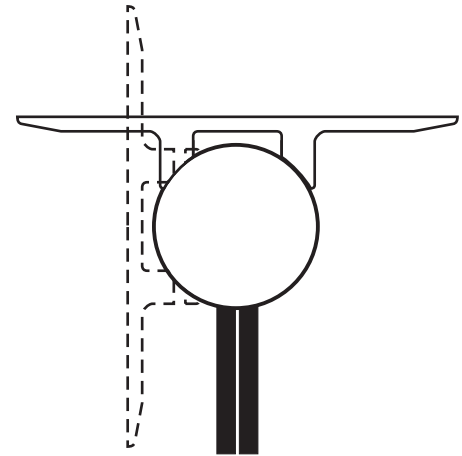

### DIAGNOSTICS OPTION

- An advanced microprocessor monitors all charger functions and battery condition continuously and automatically performs all tests and visual indications required by UL Standard 924.

### MOUNTING

- Field selectable wall or ceiling mount. No exposed hardware.

### CODES

- Manufactured and tested to UL Standard 924. Conforms to NFPA Life Safety Code 101, UBC and NEC.

### WARRANTY

- 5 year total customer satisfaction warranty. For details see product catalog technical data section.

### FIXTURE SCHEDULE

MODEL	CATALOG NO
APPROVAL	JOB INFORMATION



# Crystal Surface Mount 8" Letters

# Edge-lit LED Exit Signs Series CRS8

CRS8.10.05.05

### SUGGESTED SPECIFICATIONS:

Supply and install Sigtex CRYSTAL Series CRS8 surface mount LED exit signs. The lamp housing and canopy shall be of extruded aluminum, graphic lenses shall be optical grade acrylic with diamond polished edges. Lighting uniformity shall be better than 4:1 when measured over any illuminated area and average brightness will exceed 6 ft Lambert (21 Cd/m<sup>2</sup>). Life expectancy of the LEDs shall be in excess of 20 years. The power supply and charger shall be an isolated digital type with regulated current and voltage output to the lamp load and batteries (emergency models). AC supply shall be universal 120/277 VAC input via two-wire feed. One standard power supply shall be capable of driving up to 5 single face remote signs in addition to the master, with emergency operation at least 90 minutes for each sign. Battery charge time to restore full capacity after discharge shall be less than 24 hours.

### OPTIONS:

Pendant Mt 12"	PEN
Pendant Mt (Custom Length)	PENX
Damp Location	DP
Battery Diagnostics	DG
End Mount (L/R)	LE/RE
Mirror Lens (SF)	M
White Lens (SF)	W
Polished Gold	PG
Satin Bronze	BZ
For other Custom Colors: Call Factory	


### BATTERY DIAGNOSTIC FUNCTIONS:

Microprocessor programmed to perform tests as follows:

Continuous Monitoring w/ 1 Second Sampling	Every 28 Days	Every 12 Months
Lamp Connections	Transfer switch function	Full emergency operation test with test/ fail and manual report signal
Battery Connections	Battery discharge rate under full load	
	Test switch indicator function	

**NOTE: PRE-INSTALL 4" X 4" X 2 1/8" DEEP J-BOX**

### MOUNTING DATA & DIMENSIONS:

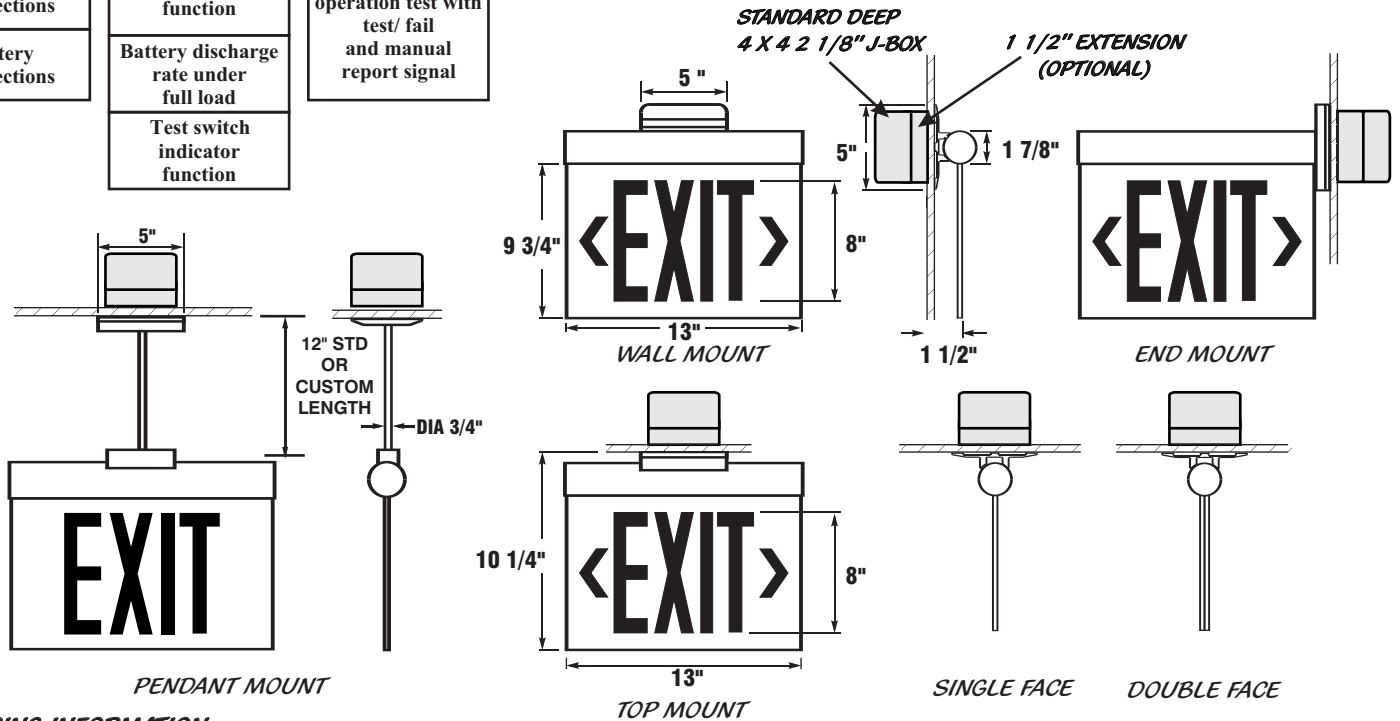

### ORDERING INFORMATION:

EXAMPLE: CRS8BB-1RCBA-NA-TW-DG

CRS8 BB - 1 R C BA - NA - TW - DG

MODEL SERIES	OPERATION	NO. of FACES	LETTER COLOR	BACKGRD COLOR	STANDAED TRIM FINISH	ARROW DIRECTION	MOUNT	OPTIONS
CRS8	BB= Battery Backup NB= Ac Only	1= Single 2= Double	R= Red G= Green	C= Clear W= White B= Black M= Mirror X= Custom	W= White BA= Brushed Alum X= Custom	NA= No Arrow AR= Arrow Right > AL= Arrow Left < AB= Arrow Both <>  Double Face Signs: NA= No Arrow LR= Single Arrow Each Side > AB= Double Arrow Each Side <>	Universal Top or Wall TW= Top or Wall	See Above



## Sigtex Inc

LIGHTING

220 VFW Avenue, Grasonville, MD 21638  
TEL: (410) 827-8300 Fax: (410) 827-8866  
sales@sigtexinc.com www.sigtexinc.com

**DISTRIBUTOR:**

